




# ZX-2S-23 VALVE



200111070

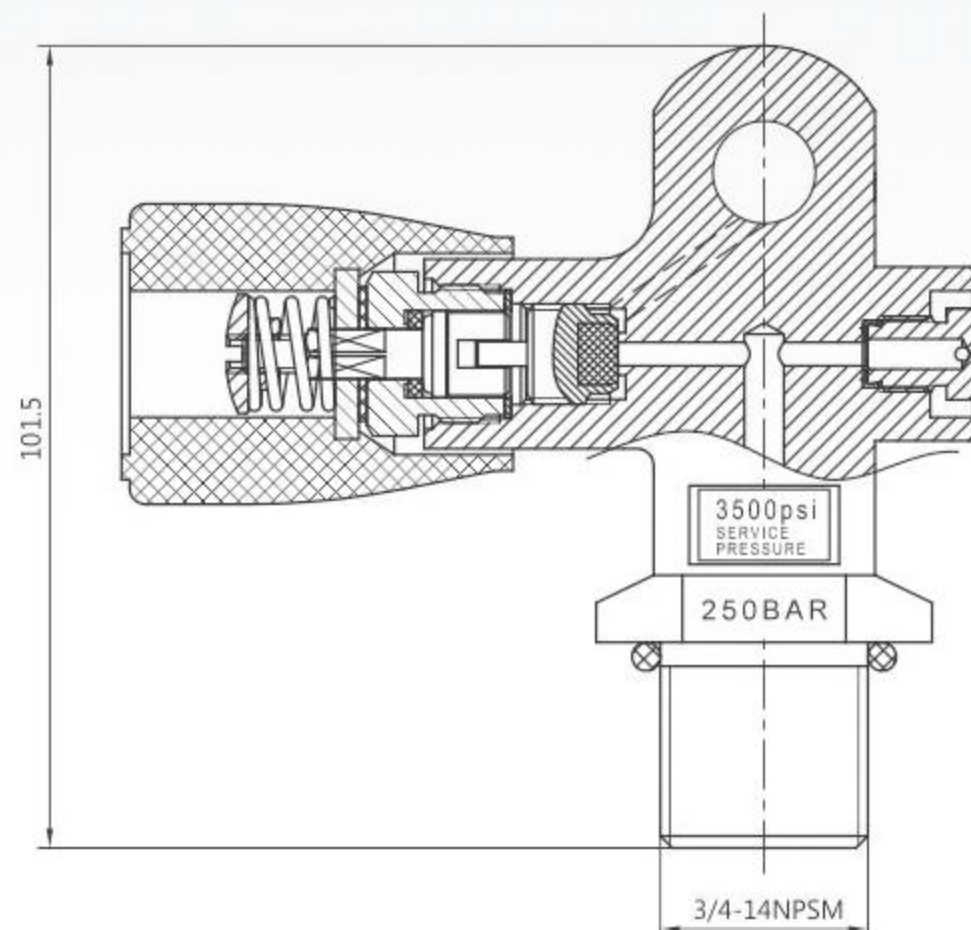

## Features

- Automated testing process under ISO9001 ensures quality.
- High leak integrity performance through 100% tests.
- DIN/YOKE quick connection provides stable and reliable gas flow.
- Positive operation can be achieved by mechanical link of the upper and lower spindle.
- Safety relief device is equipped for relieving gas while there is excessive pressure.
- Quick and easy operation due to ergonomic design.

<b>Inlet Thread</b>	3/4-14NPSM
<b>Outlet Thread</b>	DIN/YOKE CGA850
<b>Dip Tube Thread</b>	M6X0.75
<b>Working Pressure</b>	3500PSI
<b>Safety Device</b>	4350-5000PSI
<b>Gas Type</b>	Air
<b>DN</b>	2.5